


INDOOR SCOREBOARD
8296

**Basketball
Segment Timer**



OVERALL DIMENSION	2'8" high x 2'8" wide x 5" deep (Sold Individually).
INFORMATION DISPLAYED	Game Time, Shot Clock Time. If planning on using lightstrips, see 8296L (light strip ready).
DIGITS	Bright Red and Amber, 7-Segment LEDs.
GAME TIME	8" High Amber Digits, Shall register 0:00 - 99:59, 1/10 second capable. May display Time Of Day when not in use and during select sports.
SHOT CLOCK TIME	12" High Red Digits, Shall register 0-99.
CONSTRUCTION	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
HORN	Includes internal 80dB tone horn. Internal 93 dB vibrating horn (EL00898P) available.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	120VAC. Minimum one 20A circuit is recommended.
INSTALLATION	May be mounted to nearly any wall surface, or to Backboard.
WEIGHT	Net 35 lbs / Shipping 50 lbs (each).
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.

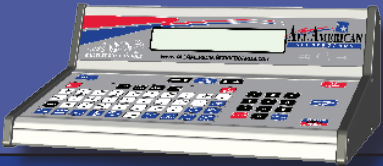

INDOOR SCOREBOARD
8296L
Light Strip Ready

Basketball
Segment Timer



OVERALL DIMENSION	2'8" high x 2'8" wide x 5" deep (Sold Individually).
INFORMATION DISPLAYED	Game Time, Shot Clock Time. Contains a connector that can connect directly to a set of All American Scoreboards light strips (sold separately). Contains internal power supply to power the light strips.
DIGITS	Bright Red and Amber, 7-Segment LEDs.
GAME TIME	8" High Amber Digits, Shall register 0:00 - 99:59, 1/10 second capable. May display Time Of Day when not in use and during select sports.
SHOT CLOCK TIME	12" High Red Digits, Shall register 0-99.
CONSTRUCTION	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
HORN	Includes internal 80dB tone horn. Internal 93 dB vibrating horn (EL00898P) available.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	120VAC. Minimum one 20A circuit is recommended.
INSTALLATION	May be mounted to nearly any wall surface, or to Backboard.
WEIGHT	Net 35 lbs / Shipping 50 lbs (each).
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.



INDOOR SCOREBOARD

8296SCS
Shot Clock Strips

Basketball
Segment Timer



OVERALL DIMENSION

2'8" high x 2'8" wide x 5" deep (Each Sold Individually).

INFORMATION DISPLAYED

Game Time, Shot Clock Time. Contains 4 internal strips of ultra-bright red leds that will light when the shotclock reaches 0.

DIGITS

Bright Red and Amber, 7-Segment LEDs.

GAME TIME

8" High Amber Digits, Shall register 0:00 - 99:59, 1/10 second capable. May display Time Of Day when not in use and during select sports.

SHOT CLOCK TIME

12" High Red Digits, Shall register 0-99.

CONSTRUCTION

5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).

ELECTRONICS

100% solid state, microprocessor controlled system.


HORN

Includes internal 80dB tone horn. Internal 93 dB vibrating horn (EL00898P) available.

SERVICING

Front access for ease of servicing. Plug in modules for ease of replacement.

MICROPROCESSOR CONTROL CONSOLE

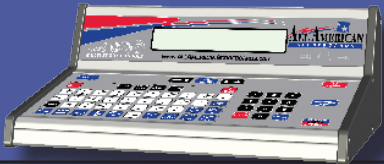

Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.

JUNCTION BOX

One junction box 5" x 3" with cover and plug. (Hardwire)

DATA CABLE

Twisted pair, direct burial, RJ45 Connectors.

POWER REQUIREMENTS

120VAC. Minimum one 20A circuit is recommended.

INSTALLATION

May be mounted to nearly any wall surface, or to Backboard.

WEIGHT

Net 35 lbs / Shipping 50 lbs (each).

WARRANTY

Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.