


OUTDOOR SCOREBOARD
8321DL
Baseball

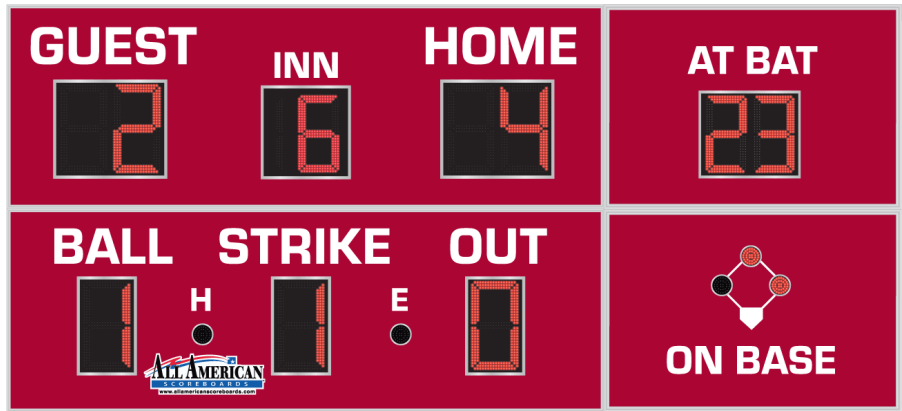

OVERALL DIMENSION	8' high x 18' wide x 4.75" deep.
INFORMATION DISPLAYED	Home Score, Guest Score, Ball, Strike, Out, Inning, Hits, Errors, On Base Indicators, At Bat
DIGITS	Bright Red, 7-Segment LEDs.
SCORE	21" High Digits, Shall register 0-99.
INNING	18" High Digits, Shall register 0-19.
BALL	21" High Digits, Shall Register 1-3.
STRIKE	21" High Digits, Shall Register 1-2.
OUT	21" High Digits, Shall Register 1-2.
HIT/ERROR INDICATORS	4" Bulls Eye, Displays Hit or Error.
PLAYER AT BAT	18" High Digits, Shall Register 00-99.
RUNNERS ON BASE	4" Bulls Eye, Displays runners on first, second and/or third base.
CAPTIONS	White vinyl letters.
CONSTRUCTION	4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Navy, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	115 VAC, 60 Hz. Minimum one 20A circuit is recommended.
INSTALLATION	May be installed on two posts. Mounting brackets are supplied with scoreboard.
WEIGHT	Net 600 lbs. / Shipping 800 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.