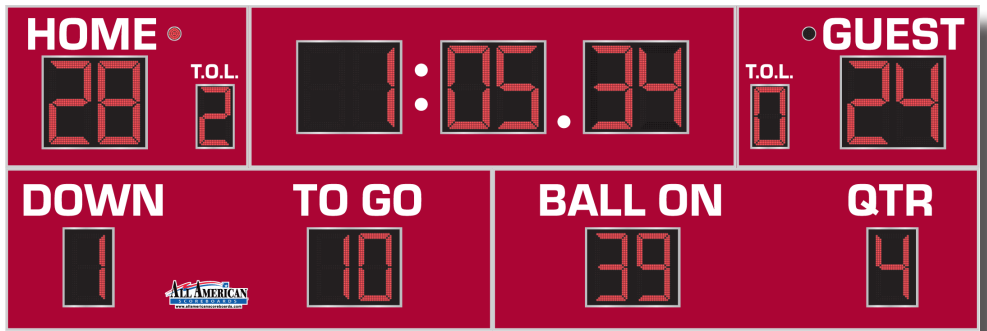



<p>OUTDOOR SCOREBOARD</p> <p>8430H</p> <p>FOOTBALL TRACK</p>	
OVERALL DIMENSION	10' high x 30' wide x 4.75" deep.
INFORMATION DISPLAYED	Game Time, Home Score, Guest Score, Time Outs Left, Down, To Go, Ball On, Quarter
DIGITS	Bright Red, 7-Segment LEDs
TIMER	30" High Digits, Shall register 0:00.00 - 99:59.59* <i>*Tenths and hundredths of a second used in track mode only.</i>
SCORING	24" High Digits, Shall register 0-99.
QUARTER	24" High Digits, Shall register 1-4.
DOWN	24" High Digits, Shall register 1-4.
TO GO	24" High Digits, Shall register 1-99.
BALL ON	24" High Digits, Shall register 1-99.
TIME OUTS LEFT	18" High Digits, Shall register 0-9.
POSSESSION	4" Red LED Bullseye indicators.
CAPTIONS	White vinyl captions.
CONSTRUCTION	4" extruded aluminum frame, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Navy, Blue, Bright Blue, Purple, Maroon, Red, Forest Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	 <p>Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.</p>
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial.
POWER REQUIREMENTS	115VAC. One 20A circuit is recommended.
INSTALLATION	May be installed on four posts. Mounting brackets are supplied with scoreboard.
WEIGHT	Net 1250 lbs. / Shipping 1600 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.