

8325LS Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 0.74A P1.2 ≈ 3.90A

P1.3 ≈ 2.90A P1.4 ≈ 2.90A

POWER 2 (Quad):

P2.1 ≈ 3.87A P2.2 ≈ 3.87A

P2.3 ≈ 3.87A P2.4 ≈ 3.87A

OUTPUTS

- 2. 3rd Base
- 3. 1st Base
- 5. 2nd Base

NOT USED
1,4,6-10

OUTPUTS

- 2. Guest Runs, Inn 9
- 3. Home Runs, Inn 9
- 4. On Base Indicators
- 5. Ball, Strike, Out
- 7. Guest Inn 1-4
- 8. Guest Inn 5-8
- 9. Home Inn 1-4
- 10. Home Inn 5-8

NOT USED
1,6,11-16



"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

Hardwire DATA

- Green (6*) BK
- Blue/White (5*) GN
- Blue (4*) W
- Green/White (3*) R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable

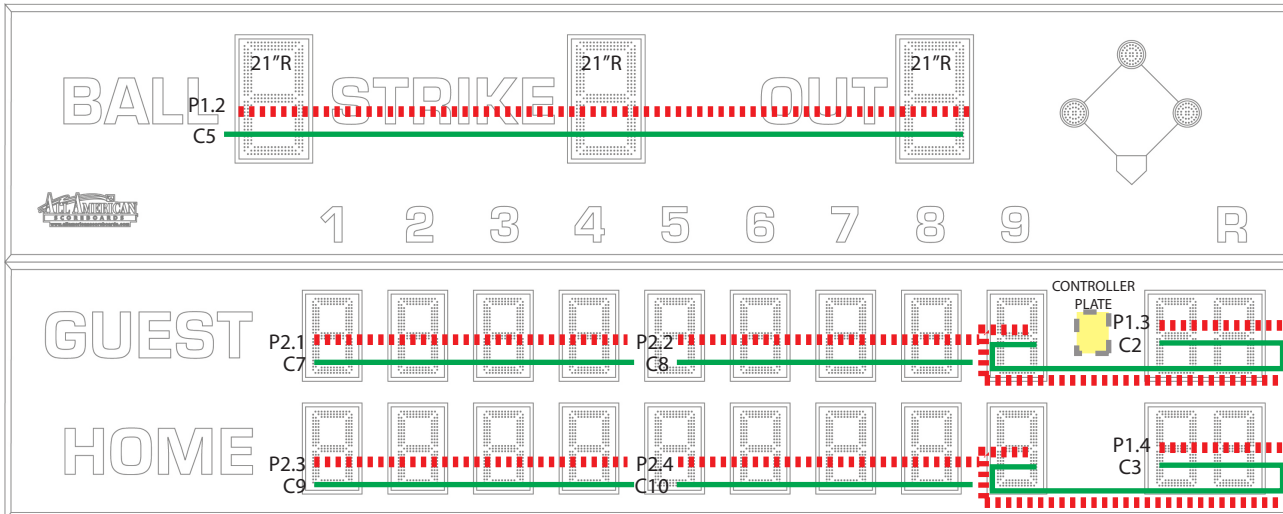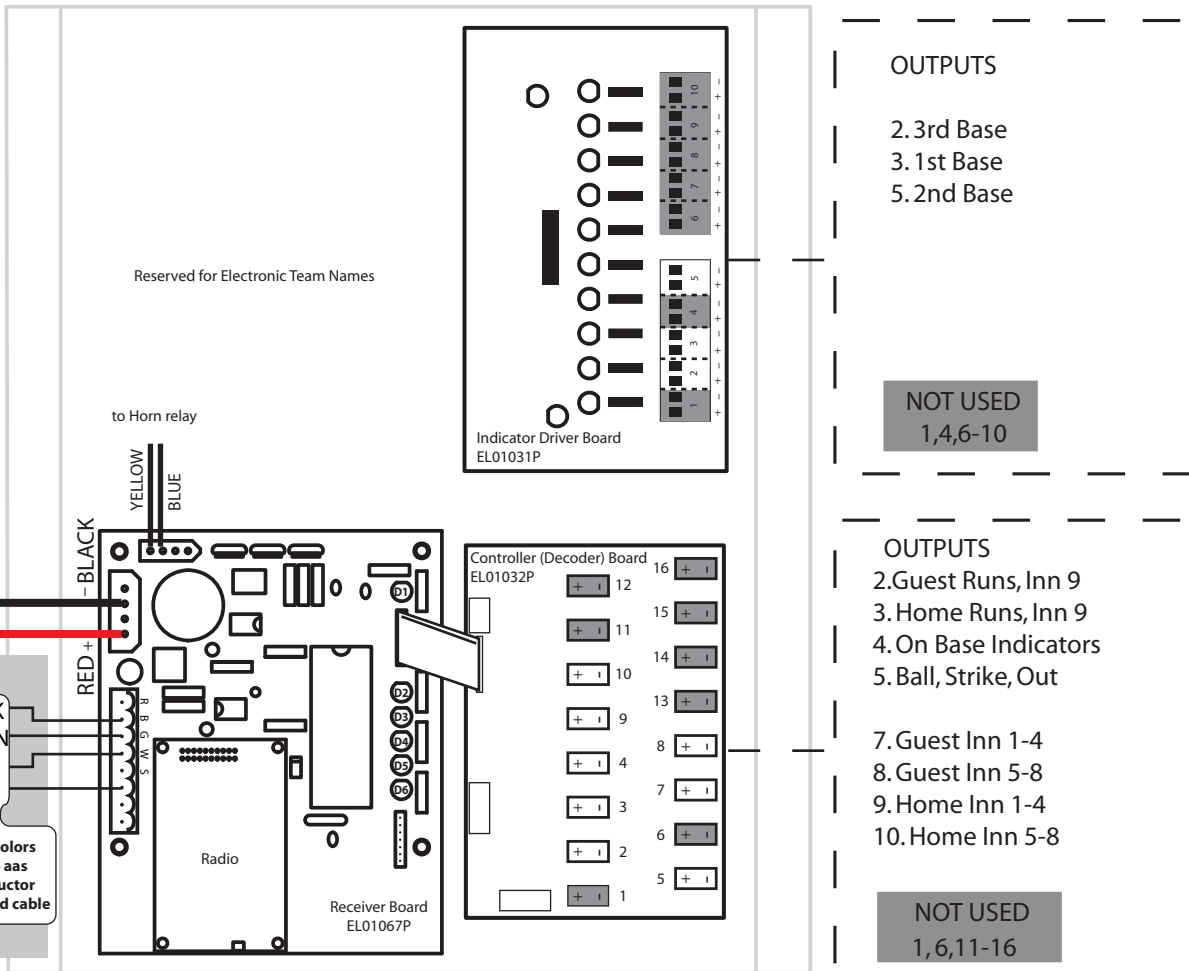

All Digits in lower panels are 14"Red. — = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 6.0 Amps